

## Electro-hydraulic workshop presses with single acting cylinder 40 - 60 ton


Single acting cylinder: One-way pressing action for where heavy tooling is not to be mounted on the piston.

Keyword:  
Compac EP 40


EP 40  
EP 60

Very long stroke of 300 mm.

Moveable cylinder .

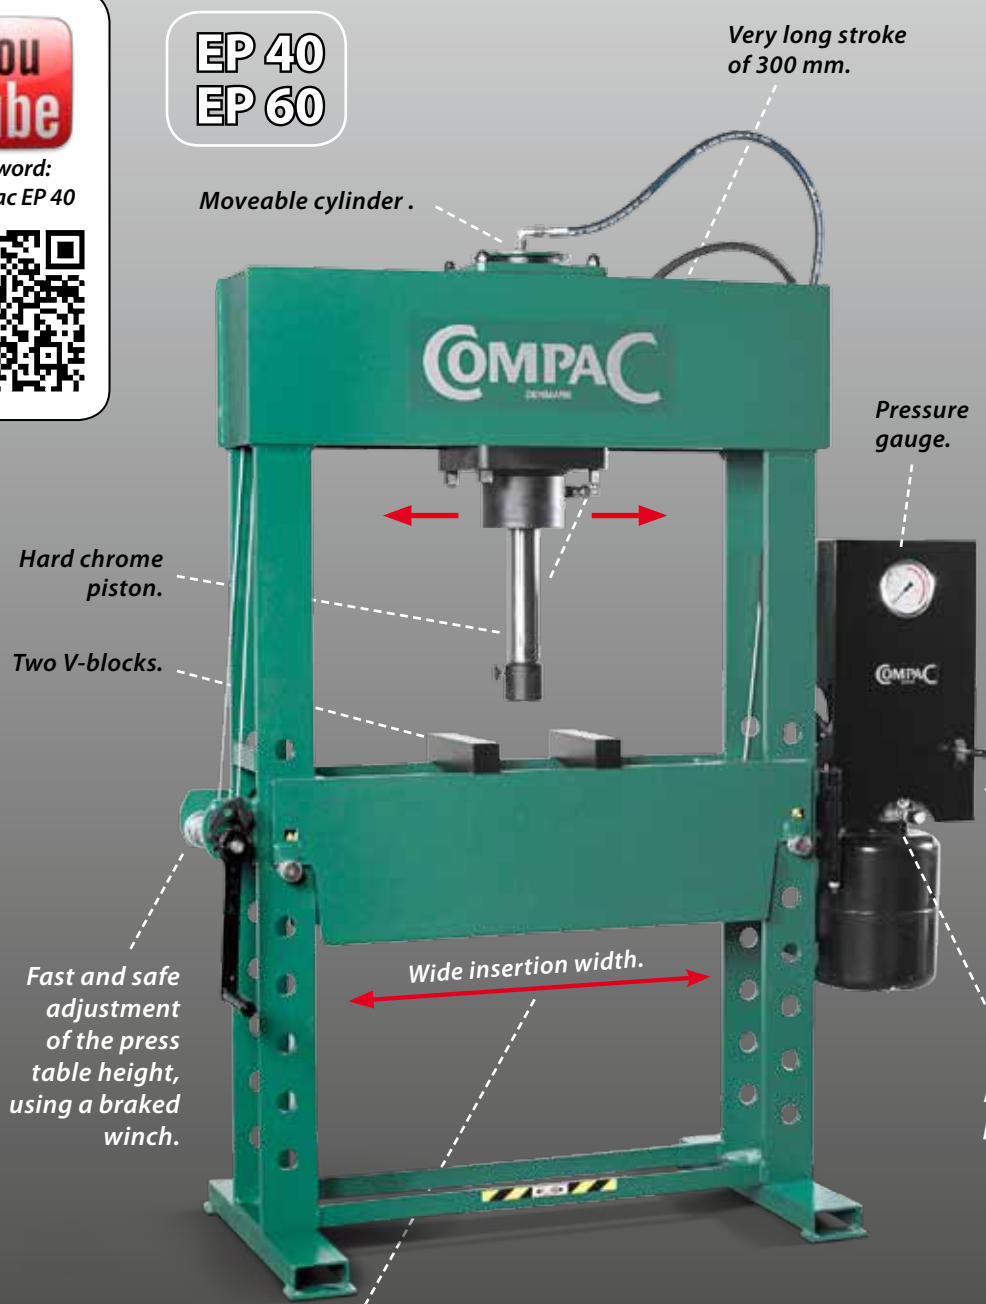

Model	Max (ton)	Max (mm/ sek)	Max (ton)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg	Kw
EP 40	40	10,0	-	750	840	200	300	125	70	1990	1480	630	407	2,2
EP 60	60	10,0/5,0	-	760	1000	255	300	160	80	2100	1680	710	707	2,2
EP 40 D	40	10,0	6	720	840	200	300	125	80	1990	1480	630	410	2,2
EP 60 D	60	10,0/5,0	6	730	1005	255	300	160	80	2100	1680	710	710	2,2
EP 100 D	100	10,0/1,4	4	915	1035	305	300	200	100	2200	1780	800	996	2,2

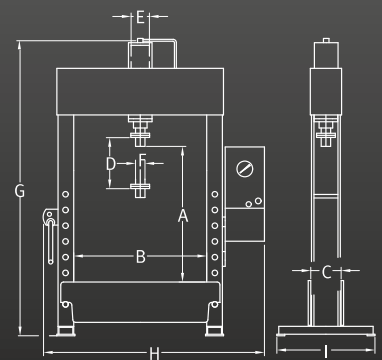

## Electro-hydraulic workshop presses with double acting cylinder 40 - 100 ton

Double acting cylinder:  
Featuring both pressing and pulling facilities.

EP 40 D  
EP 60 D  
EP 100 D

Very long stroke  
of 300 mm.

Moveable cylinder.

Hard chrome  
piston.

Flange for fitting  
of tooling.

Two V-blocks.

Fast and safe  
adjustment of the  
press table height,  
using a braked winch.

Wide insertion width.

Pressure  
gauge.

Multi-adjustable  
pressure valve.

### Accessories

Model	Nr.
EP 40	61216
EP 60	61228
EP 40 D	61216
EP 60 D	61228
EP 100 D	61233



Press punches.  
(7 pieces, Ø12, 16, 18,  
20, 22, 25, 30)

Model	Nr.
EP 40	61218
EP 60	61229
EP 40 D	61218
EP 60 D	61229
EP 100 D	61234



Bearing removal kit.  
(4 pieces, Ø64, 67, 72, 75)

61100



Press plate.



Protection guard.

Model	Nr.
EP 40	61243
EP 60	61245
EP 40 D	61243
EP 60 D	61245
EP 100 D	61247

A 90° hinged pump unit  
enables easier insertion  
of longer work-pieces.

Moveable  
cylinder.

