

## Foot operated workshop presses 40 - 50 tons



Fast and safe adjustment of the press table height, using a braked winch.




Foot operated for hands-free operation under load.




Foot operated air approach feature.

Model	Max (Ton)	(mm/ stroke)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	Kg
FP 40	40	6,0/1,0	750	840	200	300	125	70	1990	1350	630	370
HP 40	40	6,0/2,0	750	840	200	300	125	70	1990	1350	630	370
FP 50	50	6,0/1,0	750	840	200	300	125	70	1990	1350	630	370
HP 50	50	6,0/2,0	750	840	200	300	125	70	1990	1350	630	370
HP 60	60	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	680
HP 70	70	5,0/0,8	760	1005	255	300	160	80	2100	1615	710	680
HP 100	100	3,4/0,8	915	1035	305	300	200	100	2200	1637	800	946

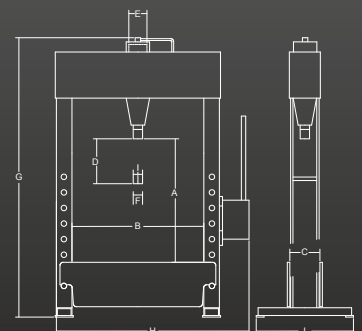

## Hand operated workshop presses 40 - 100 tons

HP 40  
HP 50  
HP 60  
HP 70  
HP 100

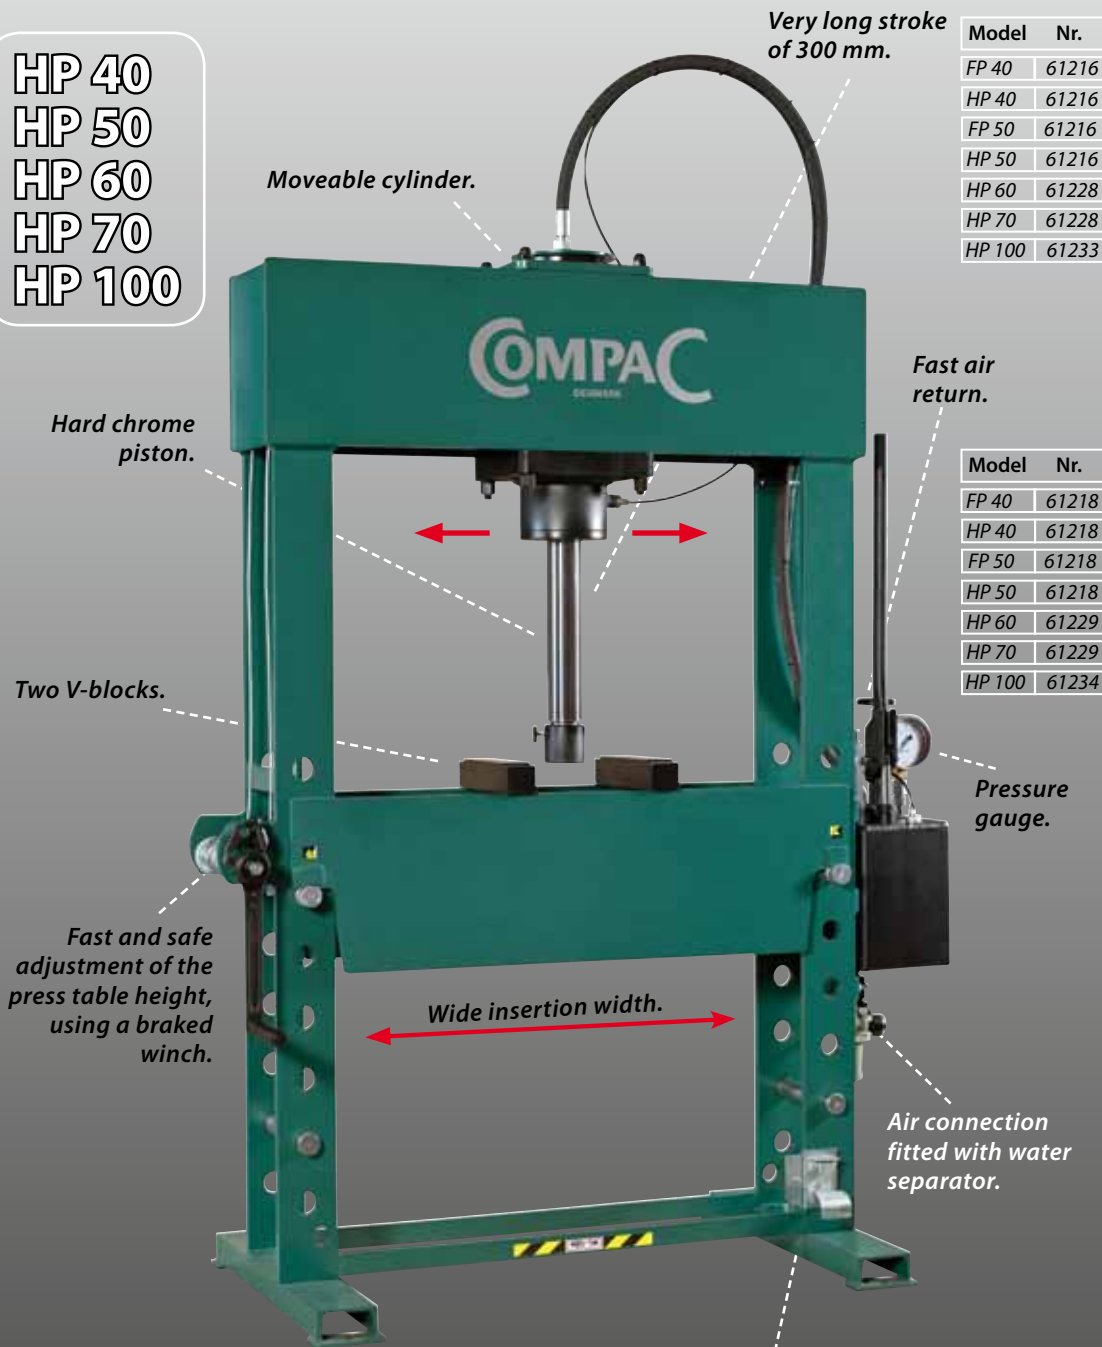

### Accessories




**Press punches.**  
(7 pieces, Ø12, 16, 18, 20, 22, 25, 30)



**Bearing removal kit.**  
(4 pieces, Ø64, 67, 72, 75)



**61100**  
Press plate.




**61240**  
Shelves for storing.



**Protection guard.**

Model	Nr.
FP 40	61243
HP 40	61243
FP 50	61243
HP 50	61243
HP 60	61245
HP 70	61245
HP 100	61247

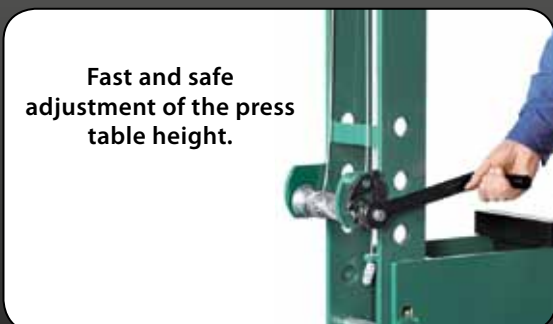

**Fast and safe adjustment of the press table height.**



**Foot operated air approach feature.**